


Characteristics:

- Operation speed: 0.5 mm - 50 cm / second
- Operating frequency:
 - Mechanical: 120 operations / minute
 - Electrical: 30 operations / minute
- Contact resistance: 25 mΩ max. (initial value)
- Insulation resistance: 100 mΩ min. (at 500VDC)
- Dielectric strength
 - 1000VAC, 50/60HZ for 1 minute between terminals of the same polarity
 - 1500VAC, 50/60 HZ for 1 minute between current-carrying and non-current-carrying metal parts
 - 1500VAC, 50/60 HZ for 1 minute between each terminal and ground
- Vibration: 10-55HZ, 1.5mm double amplitude
- Shock:
 - Mechanical durable: 1,000m / Sec² (about 100 G'S)
 - Malfunction: 300m / Sec² (about 30 G'S)
- Ambient temperature: -5°C to 65°C
- Humidity: <95% RH
- Life:
 - Mechanical: 10,000,000 times
 - Electrical: 500,000 times
- Net weight: 100 grams
- Ingress protection: IP65

Wiring Diagram:

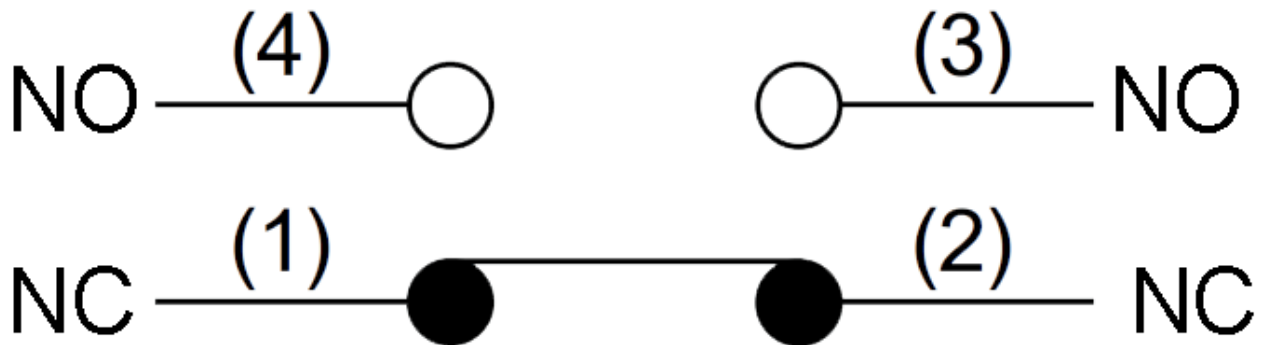

Features:

- Limit switch of double circuit type
- Highly rigid construction, consists of intensive plastic and aluminum cast (Head and cover snugly fit in box)
- Small volume, water-proof and oil-proof construction
- Built-in basic switch with double spring mechanism, longer mechanical life
- Smooth operation with greater OT
- Easy-to-wire opening circuit design
- Wide variety of actuators, easy to use

Dimensions:

